



KING DIAMOND VII

TECHNICAL SPECIFICATIONS



Dimensions: 60 a 63 cm seat centres
84 cm depth
110 cm height

Backrest: Cold moulded polyurethane foam 'UNIBLOCK' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Different options of backrest drawing. Polyurethane density 55 Kg/m³.

Seat: Cold moulded polyurethane foam 'UNIBLOCK' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Fixed in open position, anchored to the side panel by means of steel plates. Polyurethane density 65 Kg/m³.

Side panel: Texturized injected polypropylene, 80mm
End row panels completely upholstered.
Concealed floor fixation system.


Armrest: Texturized injected polypropylene completely upholstered, including integrated cupholder.

Volume: 0.200 m³/unit

Weight: 22.20 Kg not assembled

KING DIAMOND V11

DRAWING

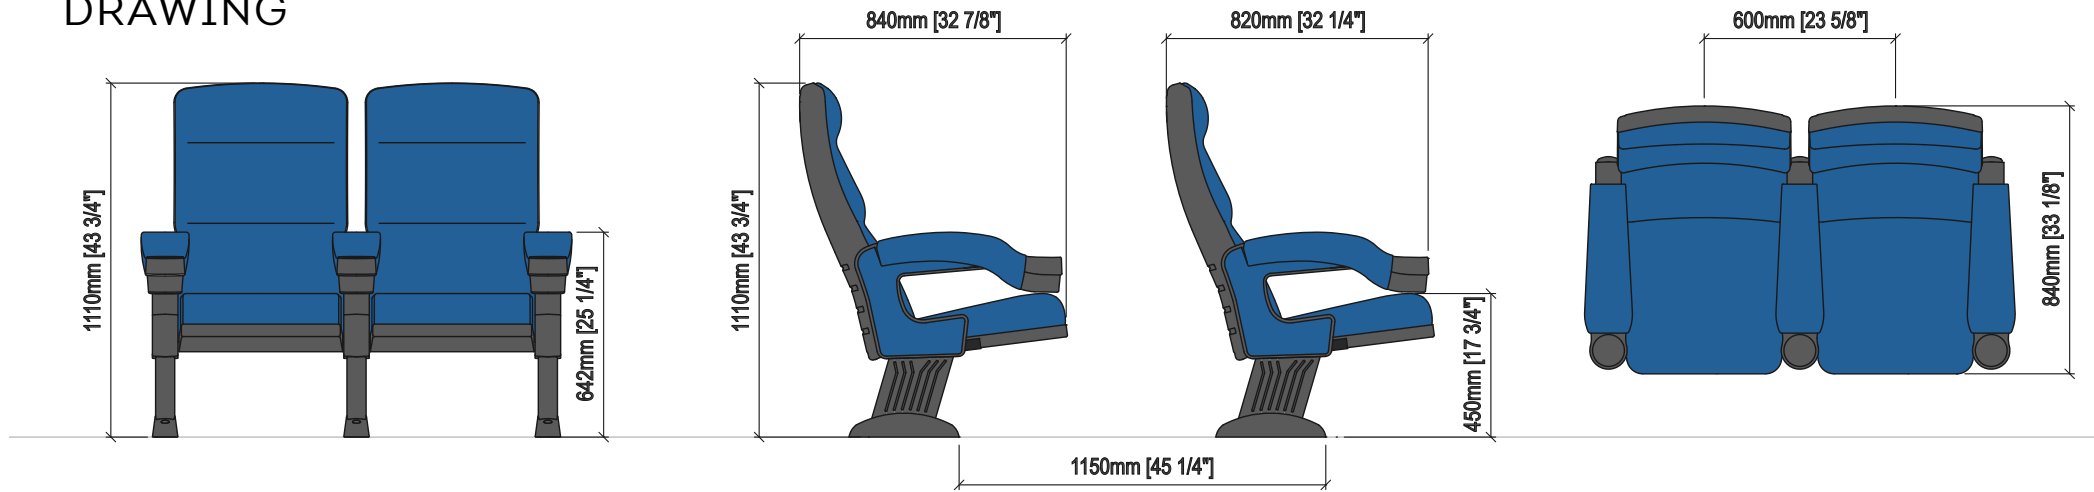

OPTIONS



CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Part 1

Fabrics	Fire barrier	Foam
•		
•		
•	•	
•	•	•
•	•	



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.